

FaceKiosk-H10A

Facial Authentication

Compatible with

 ZKBio CVSecurity



Overview

FaceKiosk-H10A elevates the corporate meeting management by offering dual authentication mode with facial authentication and card verification. Also, the terminal is equipped with an intuitive 10.1 inches LCD color touch screen and LED indicators that streamline meeting schedule and room status tracking.

Beyond its robust hardware, the FaceKiosk-H10A delivers comprehensive management capabilities that enhance workplace collaboration. The terminal supports multilingual interfaces across 10 languages, enables automated email schedule confirmations, and meeting attendance record.


Features

- Dual authentication mode with seamless access control. Support facial authentication in less than 1 seconds and card verification.
- 2MP binocular camera with WDR (wide dynamic range) technology to enhance facial authentication.
- User intuitive interface with 10.1 inches LCD color touch screen.
- Real-time room occupancy tracking with LED indicators (Green and Red).
- Comprehensive network integration with flexible connectivity. Supports Wi-Fi (IEEE 802.11b)

Specifications

Model	FaceKiosk-H10A
Display	10.1"@ Capacitive LCD Color Touch Screen (1280*800)
Camera	Binocular Camera @ 2MP WDR
Operation System	Android 7.1
Hardware	CPU: ARM Cortex-A17-Quad Core @ 1.8GHz RAM: 2GB; ROM: 8GB Supplement Light: 2*LED Red = meeting room is in use. Green= meeting room is idle.
Authentication Method	Face / Card (IC card)
Face Template Capacity	10000(1:N) (Standard)
Card Capacity	10000 (1:N) (Standard)
User Capacity	10000(1:N) (Standard)
Transaction Capacity	200000 (1:N)
Biometric Algorithm	ZKFace V5.62
Card Type	IC Card@13.56 MHz (Standard)
Communication	TCP/IP (RJ45)*1 Wi-Fi (IEEE802.11b) @ 2.4 GHz USB:(USB Drive Only / Communication)*1 Electric Lock*1, Exit Button*1
Standard Functions	Webserver, ADMS, Multiple Verification Methods
Power Supply	DC 12V 3A
Operating Temperature	-10°C to 50°C
Dimensions	241.87mm*193.87mm*28mm (L*W*H)
Net Weight	1.8 Kg
Supported Software	Software: ZKBio CVSecurity(BEST-W)/ ZKBioTime(PUSH)/ Armatura One(PUSH) Mobile Application: ZKBio Zexus Mobile APP
Installation	Wall-mount (screws and pegboard)
Certifications	ISO14001, ISO9001

Dimensions (mm)

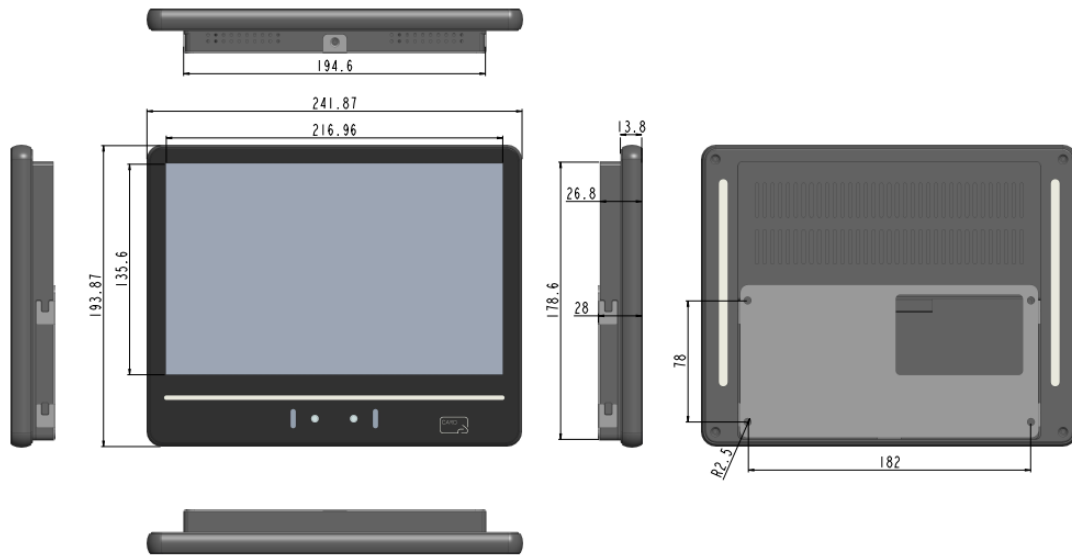

Configuration

